

**BLOW-700**

Highly Durable Blockout PVC Banner

**FEATURES**

- ▶ Matt and delicate surface.
- ▶ High tenacity base fabric promotes durability.
- ▶ Total opacity and excellent print results from leading ink technologies.
- ▶ Available in a choice of widths up to 5M.

**SPECIFICATIONS**

- ▷ Item No.  
**BLOW-700**
- ▷ Raw Material  
**100% Polyester**
- ▷ Available Width  
**Up to 5M**
- ▷ Ink printability  
**Solvent**  
**Eco-Solvent**  
**UV**  
**Latex**



**SUMMER  
MUSIC  
FESTIVAL**

SUMMER. MUSIC. FESTIVAL. POSTER. EVENT.

**02.  
04.**

**APPLICATIONS**

**Building & Construction Signage**  
**Internal & External Promotions**  
**Education, Sports, Restaurants,**  
**Retail, Advertising**

 **SOYANG**  
EUROPE

+44(0)161 765 3400  
[www.soyang.co.uk](http://www.soyang.co.uk)

For test sample please contact us at [sales@soyang.co.uk](mailto:sales@soyang.co.uk)  
or visit our website at [www.soyang.co.uk](http://www.soyang.co.uk)

# BLOW-700


## Highly Durable Blockout PVC Banner

### DESCRIPTION

Matt and delicate surface.  
High tenacity base fabric promotes durability.  
Total opacity and excellent print results from leading ink technologies.



### INK PRINTABILITY

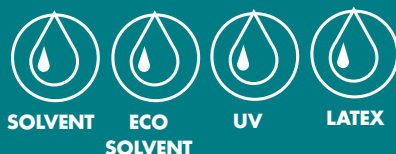

### PROPERTIES

### TEST METHOD

### METRIC

### IMPERIAL

Total Weight	DIN EN ISO 2286-2	700 g/sq.m	20.5oz/sq.yd
Base Fabric	DIN 60001	100% Polyester	
Yarn Dtex	DIN EN ISO 2060	1100 x 1100 dtex	1000 x 1000 denier
Tensile Strength	DIN EN ISO 1421	2119x1698 N/5cm	81x 34 lbs/inch
Tear Strength	DIN 53363	237 x 243N	53 x 55lbs
Adhesion	DIN 53357	No delamination	
Flame Resistance	DIN 4102	B1	
Width	N/A	Max 5m	197inch

NOTE: It is normal that the weight of most products will have an average fluctuation of 5%. All above information shall only used as a guide; buyers shall independently test and determine the products suitability. The mentioned data are average of test result and should not be used for the purpose of lawsuit or warranty.



+44(0)161 765 3400  
[www.soyang.co.uk](http://www.soyang.co.uk)

For test sample please contact us at to [sales@soyang.co.uk](mailto:sales@soyang.co.uk)  
or visit our website at [www.soyang.co.uk](http://www.soyang.co.uk)