

G-tex 401

Textured Grey Backed Banner

FEATURES

- ▶ Ideal for pop-up applications and similar in retail and exhibition where it is required to prohibit or preclude light transmission.
- ▶ Anti-scratch finish.
- ▶ The multi-polymer construction gives a good balance of printability and dimensional stability.
- ▶ Suitable for over-lamination

SPECIFICATIONS

- ▶ Item No.
G-tex 401
- ▶ Raw Material
Multi-polymer
- ▶ Available Width
Up to 1520mm
- ▶ Ink printability
Solvent
Eco-Solvent
UV
Latex



APPLICATIONS

Blockout Retail Displays
Exhibitions Graphics
Pop-up Display



SOYANG

EUROPE

+44(0)161 765 3400
www.soyang.co.uk

For test sample please contact us at to sales@soyang.co.uk
or visit our website at www.soyang.co.uk


G-tex 401

Textured Grey Backed Banner

DESCRIPTION

G-tex 401 is a lightly textured white faced printable banner material which is predominantly suitable for use a pop-up printable media when a high quality anti-scratch finish is required. It has a grey back which adds opacity to the product causing little or no 'see through' when used with standard lighting conditions.

INK PRINTABILITY

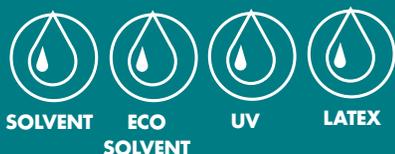

PROPERTIES



Material Type	Multi-polymer hybrid construction
Total Caliper (microns)	400 +/- 15
Base Weight (grams / sq.metre)	560 +/- 20
Printer Compatability	Latex - UV - Solvent
Max Process Temperature	100°C
Print Room Pre Conditioning	Min 24 hours before use
Available Widths	914mm; 1067mm; 1520mm
Available Lengths	30m

Printability: G-tex 401 is printable via a large range of wide format printing technology. It prints particularly well with Latex Printers & OEM inks (best on HP Latex printers from 36500 onwards). It is also printable with UV, Solvent & Eco-solvent printers with OEM inks.

When using Solvent and Eco-solvent inks, product must be laid flat immediately after printing and then left for a minimum period of 24 hours to 'solvent outgas'.

STORAGE: When unused, product must be stored in an environment which will have reasonable temperature and moisture control (Temp 23°C +/- 2°C, R.H. <55%) and not have excessive exposure to ultraviolet radiation. This will help to prolong the usable life of the product.

SHELF LIFE: 3 years when above storage conditions are maintained.

MIMIMUM EXPECTED 'IN USE' LIFE: 2 years indoors when above storage conditions are maintained. **NOTE:** It is normal that the weight of most products will have an average fluctuation of 5%.

All above information shall only used as a guide; buyers shall independently test and determine the products suitability. The mentioned data are average of test result and should not be used for the purpose of lawsuit or warranty.



+44(0)161 765 3400
www.soyang.co.uk

For test sample please contact us at to sales@soyang.co.uk
 or visit our website at www.soyang.co.uk