

Mesh MS40

PVC double coated high tenacity
polyester scrim

CoreConstruct
Building With Confidence

FEATURES

Excellent print results from
leading ink technologies.

SPECIFICATIONS

- ▷ Item No.
Mesh MS40
- ▷ Raw Material
72% PVC
28% Polyester
- ▷ Available Width
Up to 5m
- ▷ Ink printability
Solvent, Eco Solvent,
UV & Latex

APPLICATIONS

Scaffolding Hoardings
Theatrical And TV
Backdrops



SOYANG
EUROPE

+44(0)161 765 3400
www.soyang.co.uk

For test sample please contact us at sales@soyang.co.uk
or visit our website at www.soyang.co.uk


Mesh MS40

PVC double coated high tenacity
polyester scrim

DESCRIPTION

Excellent print results from leading ink technologies.
Available up to 5m

INK PRINTABILITY

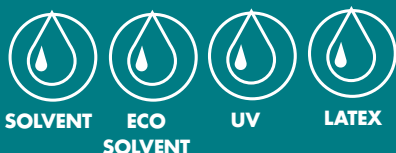

PROPERTIES

TEST METHOD

SPECIFICATION

PROPERTIES	TEST METHOD	SPECIFICATION
Thickness		0.53
Total Mass (gsm)	EN ISO 2286 - 2	330 ±30
Fabric Mass (gsm)	EN ISO 2286 -2	92 ±10
Composition	DIN 60001 - 3	72% PVC 28% Polyester
Base Fabric	DIN 60001	Polyester
Breaking Load (daN/50mm)	EN ISO 1421	Warp 130 Weft 150
Breaking Extension (%)	EN ISO 1421	Warp 15 Weft 23
Tear Strength (daN)	DIN 53363	Warp 15 Weft 15
Air Permeability (L/m ² /s)	EN ISO 9237	2200
*Flame Resistance	NF P92-503	M2

*Optional if required please enquire

NOTE: It is normal that the weight of most products will have an average fluctuation of 5%. All above information shall only used as a guide; buyers shall independently test and determine the products suitability. The mentioned data are average of test result and should not be used for the purpose of lawsuit or warranty.



+44(0)161 765 3400
www.soyang.co.uk

For test sample please contact us at to sales@soyang.co.uk
or visit our website at www.soyang.co.uk