

MESH-1812V

380gsm Mesh with Liner



FEATURES

▶ 40% air-flow through.

▶ Coming with a PVC backing which makes the feeding and printing much easier.

SPECIFICATIONS



Item No.
Mesh 1812V



Raw Material
100% Polyester



Available Width
Up to 3.2M



Ink printability
Solvent
Eco-Solvent
UV
Latex

APPLICATIONS

Scaffold Hoardings

TV backdrops

Hanging Display

Large Format Advertisement



SOYANG

EUROPE

+44(0)161 765 3400
www.soyang.co.uk

For test sample please contact us at to sales@soyang.co.uk
or visit our website at www.soyang.co.uk

MESH-1812V

380gsm Mesh with Liner


DESCRIPTION

40% air-flow through.

Coming with a PVC backing which makes the feeding and printing much easier.

Widely used for scaffolding, theatrical, TV backdrops, hanging display & large format advertisement.

INK PRINTABILITY

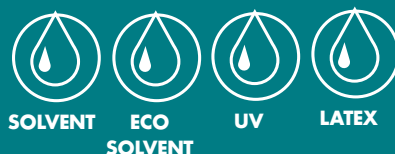

PROPERTIES

TEST METHOD

METRIC

IMPERIAL

PROPERTIES	TEST METHOD	METRIC	IMPERIAL
Total Weight	DIN EN ISO 2286-2	380g/sq.m	11oz/sq.yd
Base Fabric	DIN 60001	Polyester	
Yarn Dtex	DIN EN ISO 2060	550 x 1100 dtex	500 x 1000 denier
Tensile Strength	DIN EN ISO 1421	900x1100 N/5cm	101x128 lbs/inch
Tear Strength	DIN 53363	310x268N	42x 47lbs
Flame Resistance	DIN 4102	NFPA 701, B1, M2	
Width	NA	3.2m	126inch

NOTE: It is normal that the weight of most products will have an average fluctuation of 5%. All above information shall only used as a guide; buyers shall independently test and determine the products suitability. The mentioned data are average of test result and should not be used for the purpose of lawsuit or warranty.



+44(0)161 765 3400
www.soyang.co.uk

For test sample please contact us at to sales@soyang.co.uk
or visit our website at www.soyang.co.uk