

Polymesh 40FR

180g Recyclable Mesh



FEATURES

▶ Acrylate coated high tenacity knitted polyester scrim

SPECIFICATIONS

- ▶ Item No.
Mesh MS40
- ▶ Raw Material
72% PVC
28% Polyester
- ▶ Available Width
Up to 5m
- ▶ Ink printability
Solvent, Eco Solvent,
UV & Latex

APPLICATIONS

Scaffolding Hoardings
Theatrical & TV
Backdrops



SOYANG
EUROPE

+44(0)161 765 3400
www.soyang.co.uk

For test sample please contact us at sales@soyang.co.uk
or visit our website at www.soyang.co.uk


Polymesh 40FR

180g Recyclable Mesh

DESCRIPTION

Excellent print results from leading ink technologies.
Available up to 5m

INK PRINTABILITY

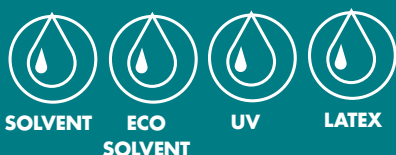

PROPERTIES

TEST METHOD

SPECIFICATION

PROPERTIES	TEST METHOD	SPECIFICATION
Thickness		0.33
Total Mass (gsm)	EN ISO 2286 - 2	180 ±20
Fabric Mass (gsm)	EN ISO 2286 -2	92 ±10
Composition	DIN 60001 - 3	72% PVC 28% Polyester
Breaking Load (daN/50mm)	EN ISO 1421	Warp 130 Weft 130
Tear Strength (daN)	DIN 53363	Warp 25 Weft 25
Air Permeability (L/m ² /s)	EN ISO 9237	3000
Average Light Transmissiion %	SF 600 Plus Spectrophotometer	
Burning Behaviour	DIN 75200	<100

NOTE: It is normal that the weight of most products will have an average fluctuation of 5%. All above information shall only used as a guide; buyers shall independently test and determine the products suitability. The mentioned data are average of test result and should not be used for the purpose of lawsuit or warranty.