

Print Floor

PVC Coated Polyester Woven Fabric

FEATURES

- ▶ PVC-coated, woven base fabric.
- ▶ Full opacity and extremely strong.

SPECIFICATIONS

- ▶ Item No.
Print Floor
- ▶ Raw Material
85% PVC 15% Polyester
- ▶ Available Width
Up to 5M
- ▶ Ink printability
Solvent
Eco-Solvent
UV
Latex

APPLICATIONS

Retail Floor Graphics
Exhibitions Flooring
Retail Displays



SOYANG
EUROPE

+44(0)161 765 3400
www.soyang.co.uk

For test sample please contact us at sales@soyang.co.uk
or visit our website at www.soyang.co.uk

Print Floor

PVC Coated Polyester Woven Fabric


DESCRIPTION

PVC-coated, polyester woven fabric.

85% PVC 15% Polyester

Widths available 160 – 250 – 320 - 500 cm

INK PRINTABILITY

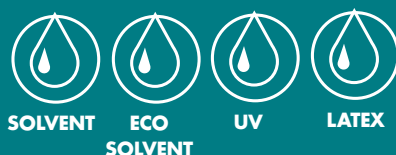

PROPERTIES

TEST METHOD

SPECIFICATION

PROPERTIES	TEST METHOD	SPECIFICATION
THICKNESS (mm)		2.50 ± 0.30
TOTAL MASS (g/m ²)	EN ISO 2286-2	1000 ± 100
FABRIC MASS (g/m ²)	EN ISO 2286-2	145 ± 10
BREAKING LOAD (daN/50mm)	EN ISO 1421	L.: 160 T.: 90
BREAKING EXTENSION (%)	EN ISO 1421	L.: 20 T.: 25
TEAR STRENGTH (daN)	EN ISO 4674-1B	L.: 3.0 T.: 3.0
COATING ADHESION (daN/50mm)	EN ISO 2411	min. 5.0
DIMENSIONAL STABILITY (%)	6h at 80°C	L.: < 2.0 % T.: < 2.0 %
BURNING BEHAVIOUR	NF P92-503	M2

L – Along T - Across

NOTE: This technical data sheet is not legal binding and is based on average results from current production. Unless otherwise stated, values cannot be considered as minimum to be satisfied.

Purchaser is fully responsible for determining the product suitability for its intended application.

Technical details are subject to change without prior notice, so please contact our technical service for any additional information you may require.



+44(0)161 765 3400
www.soyang.co.uk

For test sample please contact us at to sales@soyang.co.uk
 or visit our website at www.soyang.co.uk