

SL- F02**Solar Frontlit Banner****FEATURES**

- ▶ 1000x1000 20x20 base fabric with PA coating, PVC free, more eco-friendly.
- ▶ Higher opacity, reinforced strength, can reach different flame resistance according to customers' requirements.
- ▶ Waterproof property, can be used indoor and outdoor.

SPECIFICATIONS

- ▶ Item No.
SL-F02
- ▶ Raw Material
100% Polyester
- ▶ Available Width
Up to 5M
- ▶ Ink printability
Solvent
Eco-Solvent
UV
Latex

**APPLICATIONS**

Frontlit Banners
Education, Sports, Restaurants,
Retail, Advertising

 **SOYANG**
 EUROPE

+44(0)161 765 3400
www.soyang.co.uk

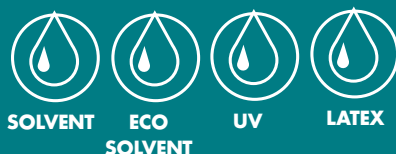
For test sample please contact us at to sales@soyang.co.uk
 or visit our website at www.soyang.co.uk

SL-F02**Solar Frontlit Banner****DESCRIPTION**

1000x1000 20x20 base fabric with PA coating, PVC free, more eco-friendly.

Higher opacity, reinforced strength, can reach different flame resistance according to customers' requirements.

Waterproof property, can be used indoor and outdoor.

**INK PRINTABILITY****PROPERTIES****TEST METHOD****METRIC****IMPERIAL**

PROPERTIES	TEST METHOD	METRIC	IMPERIAL
Total Weight	DIN EN ISO 2286-2, ASTM D751	300 g/sq.m	8.8oz/sq.yd
Base Fabric	DIN 60001, ASTM D7641	100% Polyester	
Yarn Dtex	DIN EN ISO 2060, ASTM D1907	1100 x 1100 dtex	1000 x 1000 denier
Shielding Rate	ANSI PH2.19, ISO/2	93%	
Tensile Strength	DIN EN ISO 1421	2490x22300 N/5cm	285x255 lbs/inch
Tear Strength	DIN 53363	530 x 490N	119 x 52lbs
Flame Resistance	DIN 4102-1-B1, NFPA 701 Test 1	DIN 4102-1-B1, NFPA 701 Test 1	
Width	DIN EN ISO 3759, ASTM D751-2006	Up to 5m	197inch
Length	DIN EN ISO 3759, ASTM D751-2006	50m	55yds

NOTE: It is normal that the weight of most products will have an average fluctuation of 5%. All above information shall only used as a guide; buyers shall independently test and determine the products suitability. The mentioned data are average of test result and should not be used for the purpose of lawsuit or warranty.



+44(0)161 765 3400
www.soyang.co.uk

For test sample please contact us at to sales@soyang.co.uk
or visit our website at www.soyang.co.uk