

**SL- F03****Standard Solar Greyback Frontlit Banner****FEATURES**

- ▶ PA-coated, 500x500, 28x28 base fabric.
- ▶ Greyback makes it full opacity.
- ▶ Can be used as banners indoor and outdoor.

**SPECIFICATIONS**

- ▶ Item No.  
**SL-F03**
- ▶ Raw Material  
**100% Polyester**
- ▶ Available Width  
**Up to 5M**
- ▶ Ink printability  
**Solvent**  
**Eco-Solvent**  
**UV**  
**Latex**

**APPLICATIONS**

Frontlit Roll-up Banners



+44(0)161 765 3400  
[www.soyang.co.uk](http://www.soyang.co.uk)

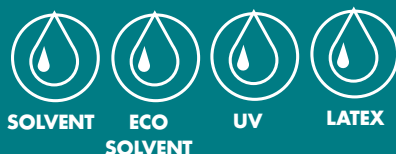
For test sample please contact us at to [sales@soyang.co.uk](mailto:sales@soyang.co.uk)  
or visit our website at [www.soyang.co.uk](http://www.soyang.co.uk)

**SL-F03****Standard Solar Greyback Frontlit Banner****DESCRIPTION**

PA-coated, 500x500, 28x28 base fabric.

Greyback makes it full opacity.

Can be used as banners both indoors and outdoors.

**INK PRINTABILITY****PROPERTIES****TEST METHOD****METRIC****IMPERIAL**

PROPERTIES	TEST METHOD	METRIC	IMPERIAL
Total Weight	DIN EN ISO 2286-2, ASTM D751	260g/sq.m	7.6oz/sq.yd
Base Fabric	DIN 60001, ASTM D7641	100% Polyester	
Yarn Dtex	DIN EN ISO 2060, ASTM D1907	550 x 550 dtex	500 x 500 denier
Shielding Rate	ANSI PH2.19, ISO/2	100%	
Tensile Strength	DIN EN ISO 1421	1650x1500 N/5cm	189x171 lbs/inch
Tear Strength	DIN 53363	265 x 265N	189 x 171lbs
Flame Resistance	DIN 4102-1-B1, NFPA 701 Test 1	DIN 4102-1-B1, NFPA 701 Test 1	
Width	DIN EN ISO 3759, ASTM D751-2006	Up to 5m	197inch
Length	DIN EN ISO 3759, ASTM D751-2006	50m	55yds

NOTE: It is normal that the weight of most products will have an average fluctuation of 5%. All above information shall only used as a guide; buyers shall independently test and determine the products suitability. The mentioned data are average of test result and should not be used for the purpose of lawsuit or warranty.



+44(0)161 765 3400  
www.soyang.co.uk

For test sample please contact us at to sales@soyang.co.uk  
or visit our website at www.soyang.co.uk