

SL- F05**Solar Silky Greyback Frontlit****FEATURES**

- ▶ 100% polyester woven fabric coated with grey back
- ▶ Greyback makes it full opacity and extremely strong.
- ▶ Can be used as wall covering, also as banner, roll-up for indoor & medium-time outdoor

SPECIFICATIONS

- ▶ Item No.
SL-F05
- ▶ Raw Material
100% Polyester
- ▶ Available Width
Up to 5M
- ▶ Ink printability
Solvent
Eco-Solvent
UV
Latex

**APPLICATIONS**

Indoor Wall Coverings
Indoor or Outdoor Banners
Frontlit Roll-up Banners



SOYANG
EUROPE

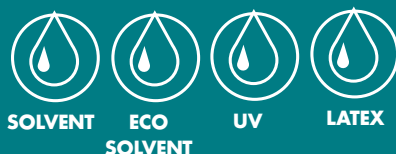
+44(0)161 765 3400
www.soyang.co.uk

For test sample please contact us at to sales@soyang.co.uk
or visit our website at www.soyang.co.uk

SL- F05**Solar Silky Greyback Frontlit****DESCRIPTION**

100% polyester woven fabric coated with grey back
Smooth surface, full opacity.

Can be used as wall covering in home deco, also as
banner, roll-up for indoor & medium-time outdoor.

**INK PRINTABILITY****PROPERTIES****TEST METHOD****METRIC****IMPERIAL**

PROPERTIES	TEST METHOD	METRIC	IMPERIAL
Total Weight	DIN EN ISO 2286-2, ASTM D751	270g/sq.m	8oz/sq.yd
Base Fabric	DIN 60001, ASTM D7641	100% Polyester	
Yarn Dtex	DIN EN ISO 2060, ASTM D1907	330 x 330 dtex	300 x 300 denier
Shielding Rate	ANSI PH2.19, ISO 5/2	100%	
Tensile Strength	DIN EN ISO 1421	1800x1200 N/5cm	206x171 lbs/inch
Tear Strength	DIN 53363	265 x 265N	189 x 137lbs
Flame Resistance	DIN 4102-1-B1, NFPA 701 Test1	DIN 4102-1-B1, NFPA 701 Test1	
Width	DIN EN ISO 3759, ASTM D751-2006	Up to 5m	197inch
Length	DIN EN ISO 3759, ASTM D751-2006	50m	55yds

NOTE: It is normal that the weight of most products will have an average fluctuation of 5%. All above information shall only used as a guide; buyers shall independently test and determine the products suitability. The mentioned data are average of test result and should not be used for the purpose of lawsuit or warranty.



+44(0)161 765 3400
www.soyang.co.uk

For test sample please contact us at to sales@soyang.co.uk
or visit our website at www.soyang.co.uk