

# FLOORWALL 150

150 micron textured PVC faced material

## FEATURES

▶ It can be adhered to most smooth clean dry floors and walls.

▶ Slip-rated to DIN 51130-2014, R10

▶ Coated with a removable clear adhesive.

## SPECIFICATIONS

▶ Item No.  
**FLOORWALL150**

▶ Raw Material  
**PVC**

▶ Available Width  
**Up to 1524mm**

▶ Ink printability  
**Solvent**  
**Eco-Solvent**  
**UV**  
**Latex**

## APPLICATIONS

Retail Floor & Wall Graphics  
Exhibitions Floors & Walls  
Retail Displays

 **SOYANG**  
EUROPE

+44(0)161 765 3400  
[www.soyang.co.uk](http://www.soyang.co.uk)

For test sample please contact us at [sales@soyang.co.uk](mailto:sales@soyang.co.uk)  
or visit our website at [www.soyang.co.uk](http://www.soyang.co.uk)

# Print Floor


150 micron textured PVC faced material

## DESCRIPTION

FLOORWALL 150 is a high quality textured 150mic, self-adhesive white PVC faced printable material which is coated with a removable clear adhesive and laminated with a 140gsm high quality PE coated silicon Kraft Paper. Predominantly suitable for use as a digitally printable floor (DIN51130-2014 R10 rated) and \* wallcovering.

It can be adhered to most smooth clean dry floors and walls which have low contamination / soiling. Please be careful to test for suitability before use as some 'eggshell' type paints and flooring containing additives like silicones and this can cause post de-lamination.

### INK PRINTABILITY

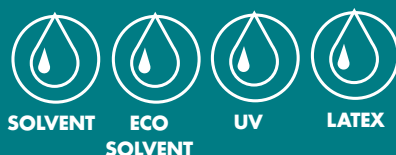

## PROPERTIES

## SPECIFICATION

Film Thickness	150mic +/- 10
Available widths	1000 ± 100
180° Peel Strength	>5N / 25mm after 24hrs on stainless steel
Available lengths	50m; Boxed with suspension ends. BREAKING EXTENSION (%)

**BEFORE USAGE:** Care must be taken to ensure the receiving surface is clean and dry and free from defects which could be detrimental to the performance of the laminate.

**STORAGE:** When unused, product must be stored in an environment which will have reasonable temperature and moisture control (Temp 23°C +/- 2°C, R.H. <55%) and not have excessive exposure to ultraviolet radiation. This will help to prolong the usable life of the product.

**SHELF LIFE:** 2 years when above storage conditions are maintained.

**MINIMUM EXPECTED 'IN USE' LIFE:** application dependent, but 2 years indoors for walls when above storage conditions are maintained. Flooring dependent upon traffic volume and type.

\*For wallcoverings a permanent adhesive may be required and the product must be approved by the customer before use. This product must be tested by the end user for absolute suitability with the substrates and environments upon which it is intended to be used.

All values and information above are approximate and should only be used as a guideline. The above information is for guidance only and does not form part of any guarantee between G-tec Paper & Film Limited and the subsequent user.



+44(0)161 765 3400  
www.soyang.co.uk

For test sample please contact us at to sales@soyang.co.uk or visit our website at www.soyang.co.uk