

# Backlit Light Eco B1/M2 (H6006-0301)

PVC Coated Polyester Banner

## FEATURES

- ▶ Brilliant Colour reproduction
- ▶ Dimensionally stable, soft with good flatness
- ▶ Ideal for printing backlit banners
- ▶ Available up to 5m wide
- ▶ Fire rated

## SPECIFICATIONS

▶ Item No.  
**H6006-0301**

▶ Available Width  
**Up to 5M**

▶ Ink printability  
**Solvent**  
**Eco Solvent**  
**UV & Latex**

*The next-level all electric automotive*

## APPLICATIONS

**Exhibition Banners**  
**Retail Backlit Banners**  
**Backlit Displays**  
**Flex Face Banners**

 **SOYANG**  
EUROPE

+44(0)161 765 3400  
[www.soyang.co.uk](http://www.soyang.co.uk)

For test sample please contact us at [sales@soyang.co.uk](mailto:sales@soyang.co.uk)  
or visit our website at [www.soyang.co.uk](http://www.soyang.co.uk)



# Backlit Light Eco B1/M2 (H6006-0301)

## PVC Coated Polyester Banner

### DESCRIPTION

Brilliant Colour reproduction  
Ideal for printing backlit banners  
Available up to 5m wide

### INK PRINTABILITY

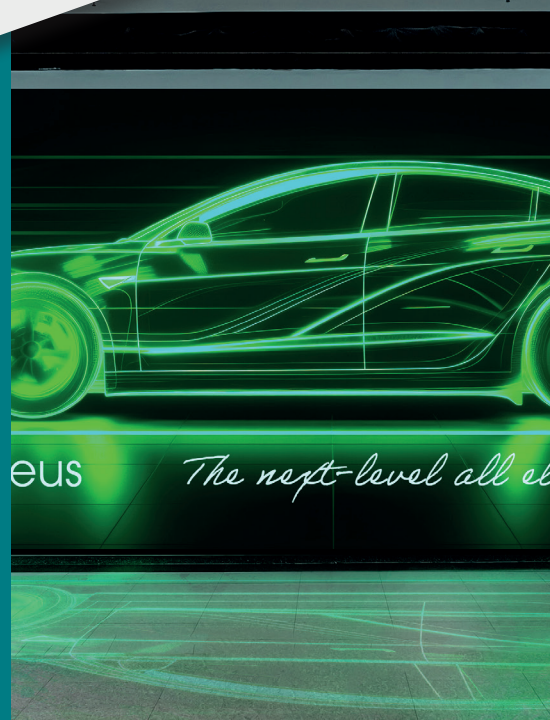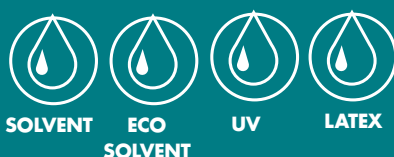

PROPERTIES	TEST METHOD	METRIC	IMPERIAL
Total Weight	DIN EN ISO 2286-2	500 g/m <sup>2</sup>	15 oz/yd <sup>2</sup>
Base Fabric	DIN EN ISO 2076	Polyester	
Coating Material	N/A	PVC	
Flame Resistance	DIN 4102 B1, NF P 92-503ff M2, NFPA 701 Test 1, Cal. Admin Code T19		
Tear Resistance	DIN 53363	ca. 430/360 N	approx. 97/81 lbs
Tensile strength	DIN EN ISO 1421-1	2900/2500 N/5 cm	308/251 lbf/inch
Width Available		Max 3.2/5m	126/197inch
Storage Stability	6 Months in temperate zones		

NOTE: It is normal that the weight of most products will have an average fluctuation of 5%. All above information shall only used as a guide; buyers shall independently test and determine the products suitability. The mentioned data are average of test result and should not be used for the purpose of lawsuit or warranty