

Frontlit Light Eco B1/M2 (H6022-0295)

PVC Coated Polyester Banner

Live green, love green, think green.

FEATURES

- ▶ Brilliant Colour reproduction
- ▶ Dimensionally stable, soft with good flatness
- ▶ Ideal for printing banners
- ▶ Available up to 5m wide
- ▶ Fire rated

SPECIFICATIONS

▶ Item No.
H6022-0295

▶ Available Width
Up to 5M

▶ Ink printability
Solvent
Eco Solvent
UV & Latex

APPLICATIONS

Exhibition
Promotional Banners
Flex Face Banners
Billboards

 **SOYANG**
EUROPE

+44(0)161 765 3400
www.soyang.co.uk

For test sample please contact us at sales@soyang.co.uk
or visit our website at www.soyang.co.uk

Frontlit Light Eco B1/M2 (H6022-0295)

PVC Coated Polyester Banner


DESCRIPTION

Brilliant Colour reproduction

Ideal for printing banners

Available up to 5m wide

INK PRINTABILITY

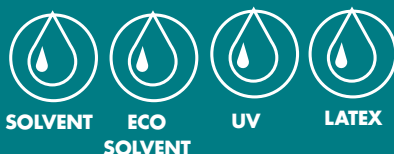

PROPERTIES	TEST METHOD	METRIC	IMPERIAL
Total Weight	DIN EN ISO 2286-2	500 g/m ²	15 oz/yd ²
Base Fabric	DIN EN ISO 2076	Polyester	
Coating Material	N/A	PVC	
Flame Resistance	DIN 4102 B1, NF P 92-503ff M2, NFPA 701 Test 1, Cal. Admin Code T19		
Tear Resistance	DIN 53363	ca. 380/320 N	approx. 88/76 lbf
Tensile strength	DIN EN ISO 1421-1	2700/2200 N/5 cm	308/251 lbf/inch
Width Available		Max 3.2/5m	126/197inch
Storage Stability	6 Months in temperate zones		

NOTE: It is normal that the weight of most products will have an average fluctuation of 5%. All above information shall only used as a guide; buyers shall independently test and determine the products suitability. The mentioned data are average of test result and should not be used for the purpose of lawsuit or warranty