

SL- M02

Solar Mesh

FEATURES

- ▶ 1000Dx1000D,
12x12/inch polyester mesh.
- ▶ 100% PVC free, truly
environmentally friendly.
- ▶ 5M width ideal for large
format outdoor applications.

SPECIFICATIONS

- ▶ Item No.
SL-M02
- ▶ Raw Material
100% Polyester
- ▶ Available Width
Up to 5M
- ▶ Ink printability
Solvent
Eco-Solvent
UV
Latex



APPLICATIONS

Wall wrapping
Building wrapping
Fence Banners



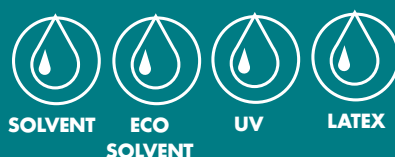
SOYANG
EUROPE

+44(0)161 765 3400
www.soyang.co.uk

For test sample please contact us at to sales@soyang.co.uk
or visit our website at www.soyang.co.uk

SL-M02**Solar Mesh****DESCRIPTION**

1000Dx1000D, 12x12/inch polyester mesh.
 100% PVC free, truly environmentally friendly.
 5M width ideal for large format outdoor applications.

**INK PRINTABILITY****PROPERTIES****TEST METHOD****METRIC****IMPERIAL**

PROPERTIES	TEST METHOD	METRIC	IMPERIAL
Total Weight	DIN EN ISO 2286-2, ASTM D751	180g/sq.m	5.3oz/sq.yd
Base Fabric	DIN 60001, ASTM D7641	100% Polyester	
Yarn Dtex	DIN EN ISO 2060, ASTM D1907	1100 x 1100 dtex	1000 x 1000 denier
Number of Threads	GB/T 4668		12x12/inch
Tensile Strength	DIN EN ISO 1421	1714x1533 N/5cm	196x175lbs/inch
Tear Strength	DIN 53363	683 x 721N	154 x 162lbs
Flame Resistance	DIN 4102-1-B1	DIN 4102-1-B1	
Width	DIN EN ISO 3759, ASTM D751-2006	Up to 5m	197inch
Length	DIN EN ISO 3759, ASTM D751-2006	50m	55yds

NOTE: It is normal that the weight of most products will have an average fluctuation of 5%. All above information shall only used as a guide; buyers shall independently test and determine the products suitability. The mentioned data are average of test result and should not be used for the purpose of lawsuit or warranty.



+44(0)161 765 3400
www.soyang.co.uk

For test sample please contact us at to sales@soyang.co.uk
 or visit our website at www.soyang.co.uk